


STEALTH

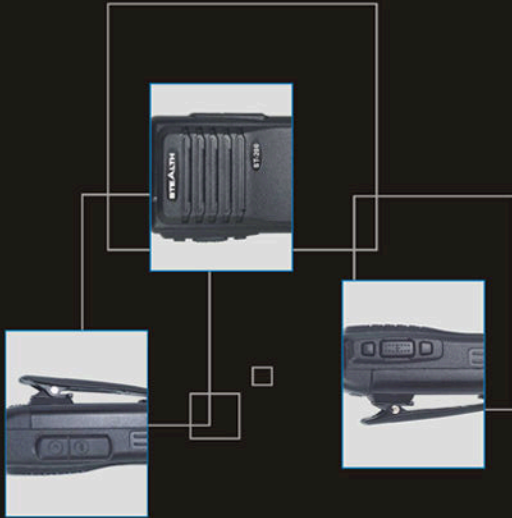

ST-200

VHF/UHF/PMR446

FM HANDHELD TRANSCEIVER

- ★ CTCSS/DCS
- ★ 16 Channels
- ★ Channel Scan
- ★ PC Programmable
- ★ High Capacity Li-Ion Battery
- ★ Compact and Robust Design

ST-200

FM HANDHELD TRANSCEIVER

MAIN FUNCTIONS

- ▣ **16 MEMORY CHANNELS**
There are 16 channels stored in the radio.
- ▣ **CTCSS/DCS**
39 groups of optional standard CTCSS and DCS are available. The channel set with CTCSS/DCS tone eliminates from unwanted audio.
- ▣ **TOT FUNCTION**
Time-out Timer limits the time of each transmission and avoids any damage caused by long-time continuous transmission.
- ▣ **MONITOR FUNCTION**
Monitor the current channel, it is useful to adjust the volume level or receive a weak signal.

- ▣ **BATTERY SAVE**
When no signal being received or no operation being performed for more than 10 seconds, the radio auto saves to reduce the battery consumption.
- ▣ **LOW POWER ALERT**
When the battery power appears low, an audio alert is activated.
- ▣ **WIRED CLONE**
All stored data can be transferred to another radio of the same model by a specific cable.
- ▣ **TAIL TONE ELIMINATION**
To eliminate the annoying audio caused by carrier wave disappearing after the transmitter ends the communication.

OPTIONAL ACCESSORIES



12V Car Charger



Earphone



Handmic



Magnetic-Antenna

SPECIFICATION

Frequency	136~174MHz	440~470MHz	PMR446MHz
RF power	5W/4W/0.5W		
Channel capacity	15+1		
Operating temperature	-20℃~+60℃		
Battery	DC 7.4V (Li-ion battery 1100mAh)		
Antenna impedance	50Ω		
Sensitivity(12dB SINAD)	<0.2uV		
Frequency stability	±2.5ppm		
Dimension	93mm×50mm×23.5mm		
Weight	190g (with battery)		